

MEAN WELL POWER SUPPLY SWITCHING is POWER SUPPLY in a format of SWITCHING from MEAN WELL; it converts AC to DC, there are various sizes of VOLT and CURRENT. It is suitable for Projects that requires high quality; it reduces problem with electrical interruption; moreover, it provides Circuits that prevents the circuit from SHORT CIRCUIT/ OVER VOLTAGE/ OVER LOAD.



RS-15-12 (A-AP-A-00127)

- INPUT VOLTAGE : 85VAC TO 264VAC : 47-63Hz
- OUTPUT VOLTAGE : 12VDC / 1.3A / 15.6W
- COOLING BY FREE AIR CONVECTION
- 100% FULL LOAD BURN-IN TEST
- SIZE L x W x H : 62.5 x 51 x 28 mm.



RS-15-5 (A-AP-A-00129)

- INPUT VOLTAGE : 85VAC TO 264VAC : 47-63Hz
- OUTPUT VOLTAGE : 5VDC / 3A / 15W
- COOLING BY FREE AIR CONVECTION
- 100% FULL LOAD BURN-IN TEST
- SIZE L x W x H : 62.5 x 51 x 28 mm.



LRS-35-5 (A-AP-A-00130)

- INPUT VOLTAGE : 85VAC TO 264VAC : 47-63Hz
- OUTPUT VOLTAGE : 5VDC / 5A / 35W
- COOLING BY FREE AIR CONVECTION
- 100% FULL LOAD BURN-IN TEST
- SIZE L x W x H : 99 x 82 x 30 mm.



LRS-50-12 (A-AP-A-00128)


- INPUT VOLTAGE : 85VAC TO 264VAC : 47-63Hz
- OUTPUT VOLTAGE : 12VDC / 4.2A / 50.4W
- COOLING BY FREE AIR CONVECTION
- 100% FULL LOAD BURN-IN TEST
- SIZE L x W x H : 99 x 82 x 30 mm.



APV-12-12 (A-AP-A-00131)


- INPUT VOLTAGE : 90VAC TO 264VAC : 47-63Hz
- OUTPUT VOLTAGE 12VDC / 1A / 12W
- FULLY ISOLATED PLASTIC CASE ENCLOSED
- IP42 DESIGN
- มีมาตรฐาน มอก. TIS1955-2551 (บริภัณฑ์ ส่องสว่าง)
- SIZE L x W x H : 77 x 40 x 29 mm.

HI-LINK ULTRA-COMPACT POWER MODULE is a mini MODULE POWER SUPPLY AC TO AC, with PIN for connecting to PCB; it is suitable for directly connecting to PCB, especially a compact and functional project. It directly connects to AC 100-240VDC, OUTPUT is DC; 12VDC 0.45A, 5VDC/1A. It also provides Circuit OUTPUT OVERLOAD and SHORT CIRCUIT PROTECTION.

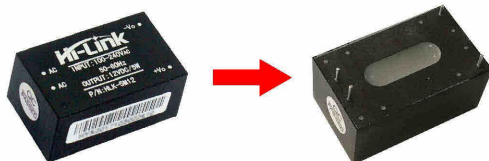


HLK-5M12 (A-AP-A-00132)

- INPUT VOLTAGE : 100-240VAC : 2PIN
- OUTPUT VOLTAGE : 12VDC / 0.45A / 5W : 2PIN
- SAFETY STANDARDS : UL, CE
- SIZE L x W x H : 38 x 23 x 18 mm.

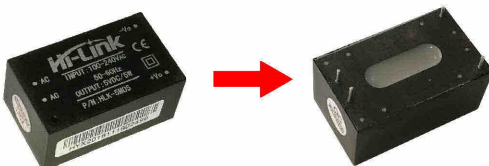

HLK-5M05 (A-AP-A-00133)

- INPUT VOLTAGE : 100-240VAC : 2PIN
- OUTPUT VOLTAGE : 5VDC / 1A / 5W : 2PIN
- SAFETY STANDARDS : UL, CE
- SIZE L x W x H : 38 x 23 x 18 mm.

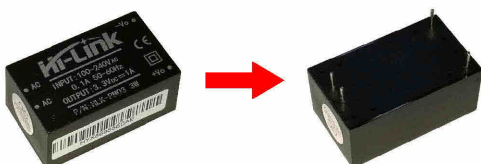

HLK-PM03 (A-AP-A-00134)

- INPUT VOLTAGE : 100-240VAC : 2PIN
- OUTPUT VOLTAGE : 3.3VDC / 0.9A / 3W : 2PIN
- SAFETY STANDARDS : UL, CE
- SIZE L x W x H : 34 x 20 x 15 mm.